

Control Panel Modules - FACP 8008


771794  CPU card for FACP 8008



Panel control unit for installation in 8008 fire alarm panel.

 A second I/O card (784760) and the 770393 slave software package are required for a redundant CPU card.

784760  Input/output (I/O)-card for micromodules - Esser

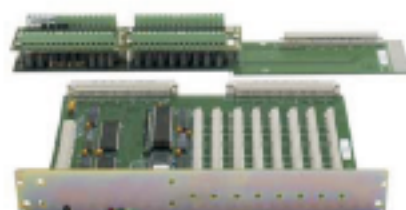

I/O card for the control of micromodules and the modular extension of the panel. Including BUS communication and data exchange with the central processing unit. Up to 8 micromodules can be mounted on each I/O card.

 Including 771450 I/O terminal card

771670  Master box interface module - Esser, Dutch

Accessories for Fire Alarm Panel 8008

784026  Power supply unit for FACP 8008



Primarily pulsed supply unit for supplying power to FACP 8008 and recharging batteries in parallel mode.

Technical Data

Mains voltage	115V DC / 230V AC / 50HZ
Mains frequency	50 to 60Hz
Operating voltage	12V DC / 24V DC
Power drain	12V DC / 4A; 24V DC / 1A
Battery capacity	max. 2 x 40Ah