

## GBDD

Multi Loose Tube Cables  
Outdoor - Corrugated Steel Tape Armor (CST)  
A-DQ(ZN)2Y(SR)2Y  
Full Rodent Protection

### Ordering Information

Belden European Part Numbers

Fibre type / count	12	24	36	48	60	72
62.5/125-OM1	GBDD112	GBDD124	GBDD136	GBDD148	GBDD160	GBDD172
50/125-OM2 BW 600/1200	GBDD212	GBDD224	GBDD236	GBDD248	GBDD260	GBDD272
50/125-OM3	GBDD312	GBDD324	GBDD336	GBDD348	GBDD360	GBDD372
50/125-OM2e	GBDD412	GBDD424	GBDD436	GBDD448	GBDD460	GBDD472
50/125-OM2 BW 500/500	GBDD512	GBDD524	GBDD536	GBDD548	GBDD560	GBDD572
50/125-OM4	GBDD612	GBDD624	GBDD636	GBDD648	GBDD660	GBDD672
9/125 ITU G.655	GBDD712	GBDD724	GBDD736	GBDD748	GBDD760	GBDD772
9/125 ITU G.652D-OS2	GBDD812	GBDD824	GBDD836	GBDD848	GBDD860	GBDD872
Std. plywood reel (non-returnable)	Ø 1250 * 688 mm 93 kg					
Std. delivery length	2100 ± 100m					


### Applications

- For **outdoor** use in structured (data) wiring systems such as (**campus backbone**).
- For **outdoor** use in networks for telecom, cable TV and/or broadcast.
- Easy to install in ducts, tunnels and trenches by means of compressed air or pulling wire.
- Suitable for direct burial (crush ≤ 400 N/cm).

### Features & Benefits

- **Installation friendly dry interstices** between the loose tubes.
- **High mechanical and full rodent protection** provided by corrugated steel tape (**CST**) armor.
- **Predicted lifetime > 30 years.**

## Construction & Dimensions

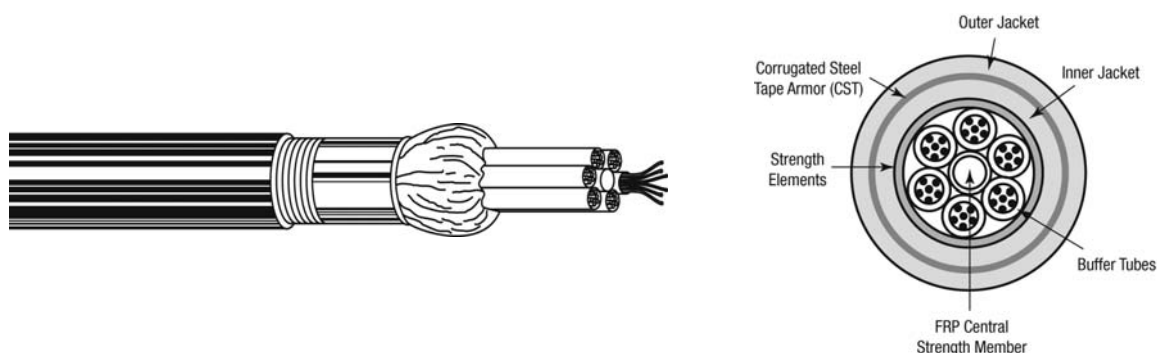

### Cable Specifications (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also as protection against kinks, surrounded by swelling yarns.
2. Jelly filled (non-dripping and silicon-free) loose tubes with primary coated optical fibres ( $\text{Ø } 250 \pm 15 \mu\text{m}$ ). Individually colour coded optical fibres: red – green – blue – yellow – violet – pink – orange – black – grey – brown – white – turquoise.
3. The loose tubes are stranded around the central element, if necessary with fillers (PE-natural), surrounded by swelling tape.  
Colour coding of the loose tubes: 1. red – 2. green – rest white.
4. Swellable (for the longitudinal watertightness) aramid yarns as strength members.
5. PE inner jacket.
6. Corrugated Steel Tape Armoring (CST): longitudinally applied steel tape (0.155 mm).
7. Black UV resistant PE outer jacket.  
Identification: BELDEN OFC – “cable type” – “number x fibre type” + date-, meter- and P/N marking.

### Mechanical Data

No. of fibres	Max. 72
Cable core	6 tubes
Ø Central element (mm)	2.7
Ø Loose tube (mm)	2.5
Ø nom./max. (mm)	15.2 / 15.5
Energy of flame (kJ/m)	6100
Weight (kg/km)	200

Belden Technical Support +31 (0) 77 3875 414

[www.belden-emea.com](http://www.belden-emea.com)

## Optical Characteristics

### Characteristics (cabled) Single-Mode – Matched-Cladded optical fibres according to ITU.

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (um)	Wave-length (nm)	Attenuation average/ max. (dB/km)	Dispersion (ps/(nm-km))	PMD (ps/km)	Cable Cut-off Wave-length (nm)
8	9/125 G.652D OS2	9.2 ± 0.4 125 ± 0.7	1310 1550	0.32 / 0.40 0.21 / 0.30	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
7	9/125 G.655	8.4 ± 0.6 125 ± 1	1550	0.25 / 0.30	3.5 – 8.5	≤ 0.1 <sup>A</sup>	≤ 1260

Note A- Link design value

### Characteristics (cabled) Multi-Mode Graded-Index optical fibres according to IEC 60793

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field Diameter (um)	Wave-length (nm)	Attenuation average/ max. (db/km)	Bandwidth (MHz•km)	Ethernet Performance (m)		Num. Apert. (µm)	Refr. Index
						1GBE	10 GBE		
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.2 0.6 / 1.1	≥ 200 ≥ 600	275 550	33 n.a.	0.275 ± 0.015	1.495 1.490
5	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.4 / 3.0 0.7 / 1.0	≥ 500 ≥ 500	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
2	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.8 0.6 / 0.9	≥ 600 ≥ 1200	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
4	50/125 OM2e	50 ± 2.5 125 ± 1	850 1300	2,3 / 2,8 0,6 / 0,9	≥ 600 ≥ 1200	750 2000	110 na	0.20 ± 0.015	1,481 1,476
3	50/125 OM3	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 1500 ≥ 500	900 550	300 n.a.	0.20 ± 0.015	1.482 1.477
6	50/125 OM4	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 6000 ≥ 500	900 550	550 n.a.	0.20 ± 0.015	1.482 1.477

A test report (attenuation) is supplied with each delivery.

## Mechanical, Physical and/or Environmental Characteristics

Requirements	
<b>Temperature range</b> according to IEC 60794-1-2-F1 Transport/storage Installation Operation	-30 to + 70 °C -5 to + 50 °C -30 to + 70 °C
<b>Pulling tension</b> according to IEC 60794-1-2-E1 Long term Short term	≤ 3500 N ≤ 7000 N
<b>Bending radii for fibres and tubes</b> Installation/operation	>25 mm
<b>Watertightness (core + inner jacket)</b> according to IEC 60794-1-2-F5	Yes
<b>Crush resistance</b> according to IEC 60794-1-2-E3 Armoured Central Loose Tube Cable	≤ 50 KN/m
<b>Bending radii cable</b> Static according to IEC 60794-1-2-E11 Dynamic according to IEC 60794-1-2-E6	15 x Ø 20 x Ø

## Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

## Options

- Cables for indoor / outdoor use.
- **Non-standard cable constructions**, colours, details and/or additional information regarding specifications are available on request.

Revision

Rev.	Description	Date	Init.
02	OM3+ changed to OM4	12/10/09	JW
03	OS2 added	30/11/09	JW
04	Extended description watertightness	22/03/10	SN
05	Changed energy	22/11/10	TvR
Date: 23/09/08		Page 1 of 1	Part Number: <b>GBDD</b>
Orig.: SN		Review:	