

Central Loose Tube Cables

Outdoor – Corrugated Steel Tape Armor (CST), Full Rodent Protection

De- scription	Part No.	No. of Fibers	Standard Lengths		Standard Unit Weight		Fiber Size μm	Nom. Buffer / Tube OD		Strength Members	Nominal OD		Central Element mm	Pulling Tension N	Crush Re- sistance kN/m	Energy kJ/m	Bending Radii Cable (mm)	
			ft.	m	lbs.	kg		inch	mm		inch	mm					static	dyna- mic


GOCB • Loose Tube (Jelly-Filled, Non-Dripping and Silicone-Free) • Longitudinal Watertightness • CST • A-DQ(ZN)(SR)2Y

Dry Construction • Single Black PE Jacket

-30/70°C			6888	2100	518.5	235.2	$\emptyset 250 \pm 15$	0.16	4.0	Longitudinal watertightness Swellable Glass Yarn	0.42	10.6	no	2000	40	–	106	212
----------	--	--	------	------	-------	-------	------------------------	------	-----	---	------	------	----	------	----	---	-----	-----



GOCBx02 2
GOCBx04 4
GOCBx06 6
GOCBx08 8
GOCBx12 12
GOCBx16 16
GOCBx24 24

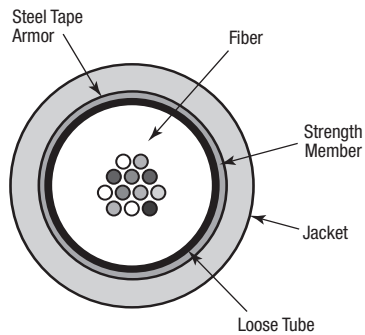


Color Code: see chart page 16.23


GOD • Loose Tube (Jelly-Filled, Non-Dripping and Silicone-Free) • Longitudinal Watertightness • CST • A-DQ(ZN)2Y(SR)2Y

Dry Construction • Double Black PE Jacket

-30/70°C			6888	2100			$\emptyset 250 \pm 15$			Longitudinal watertightness Swellable Glass Yarn								
----------	--	--	------	------	--	--	------------------------	--	--	---	--	--	--	--	--	--	--	--



GODAx02	2				666.7	302.4		0.11	2.8		0.43	11.0	no	2000	40	–	110	220
GODAx04	4																	
GODAx06	6																	
GODAx08	8																	
GODAx12	12																	
GODBx16	16				822.3	373.0		0.16	4.0		0.496	12.6	no	2000	40	–	126	232
GODBx24	24																	

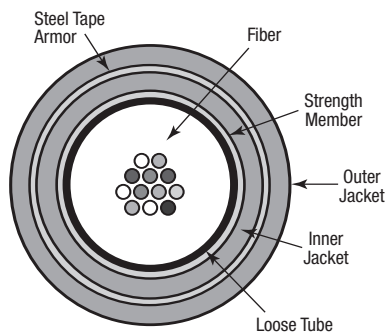

Color Code: see chart page 16.23

Optical characteristics see page 16.21.