

CU 7060 4P / 2x4P F8
Data cable, S/FTP, Category 6A, AWG23, Euroclass Cca



- 1 Inner conductor:** AWG23 Bare copper wire
2 PE insulated conductor: 1.3 mm Ø
3 Screen (pair): Alu PETP foil
4 Overall screen: Tinned braided copper
5 Outer sheath: FRNC/LSOH orange RAL 2003




DESCRIPTION

Electrically and mechanically superior quality Cat.6A data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, EN 50173-1 and prEN 50288-10-1. Excellent shielding effect due to individually screened pairs and overall copper braid. Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

APPLICATION

Data cable for structured premises cabling.
For the transmission of digital and analogue voice, video and data signals.
Suitable for all ICT network applications up to class EA applications (500 MHz) in accordance with EN 50173-1 and ISO/IEC 11801.
Applicable for Power over Ethernet (PoE) / PoE+.

GRAPH

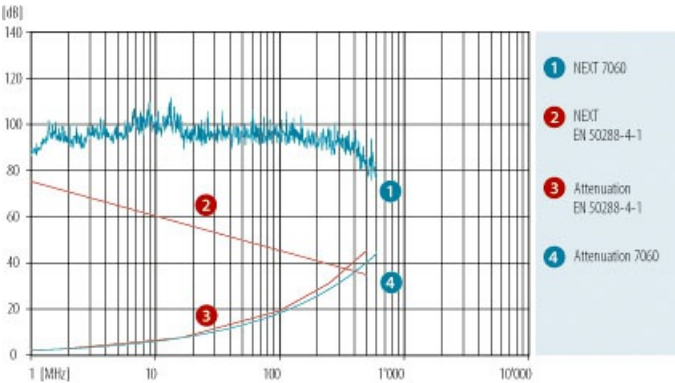

ELECTRICAL CHARACTERISTICS

Category	1	4	10	5e	6	6A	
Frequency [MHz]				100	250	500	600
Attenuation [dB/100m]	2.1	3.8	5.9	19.1	30	43	47
NEXT [dB]	93	93	93	93	82	77	75
PS NEXT [dB]	90	90	90	90	79	74	72
ACR-N [dB]	91	89	87	73	52	34	28
PS-ACR-N [dB]	88	86	84	70	49	31	25
ACR-F [dB]	96	96	96	74	61	43	39
PS-ACR-F [dB]	93	93	93	71	58	40	36
Return loss [dB]	26	28	30	30	27	25	24

These performance data are typical measured values.

CU 7060 4P / 2x4P F8

Data cable, S/FTP, Category 6A, AWG23, Euroclass Cca



ELECTRICAL PROPERTIES

Category:	Cat.6A
Coupling attenuation:	70 dB
Delay Skew:	4 ns/100 m
Impedance at 100 MHz, $\pm 5\Omega$:	100 Ω
Loop resistance at 20°C:	< 146 Ω /km
Near end unbalance attenuation LCL at 1-600 MHz:	40 dB
NVP %:	80
operating capacity:	42 pF/m
Transfer impedance 1/10/30 MHz:	< 9/12/30 m Ω /m

SUPPORTED APPLICATIONS

10Base-T, 100Base-T, 1000Base-T, 2.5GBase-T, 5GBase-T, 10GBase-T, Fieldbus

MECHANICAL PROPERTIES

Minimum bending radius during installation:	65 mm
Minimum bending radius permanently installed:	30 mm
Tensile strength (4P):	95 N
Tensile strength (2x4P):	190 N
Minimal crush resistance / 10cm:	1,000 N
Minimum number of impacts:	10
Installation temperature:	0 °C - +50 °C
Operating temperature:	-20 °C - +60 °C

STANDARDS

Reaction to fire (Euroclass)	EN 13501-6: C _{ca}
Wire colour	white/bluewhite/orangewhite/greenwhite/brownin accordance with IEC 60189 and IEC 60708
Imprint	DATWYLER «cable type» «additional text» «batch number» «meter marks»
Zero halogen, no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA
Flame propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2, AREI-RGIE Art.104-F1
Flame spread	IEC 60332-3-24, EN 60332-3-24, AREI-RGIE Art.104-F2
Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD
PoE	IEEE 802.3at
EMC	shielded
Segregation class	c
Cat./Class	Cat 6A / Class E _A - limit values as specified by IEC 61156-5 and EN 50288-10-1 guaranteed

VERSIONS

Article No.	DoP	Product	Reaction to fire (Euroclass)	Dimensions n x p x [mm (AWG)]	Sheath	Sheath colour	Connector type	Sheath Ø [mm]	Weight [kg/km]	Cu rate [kg/km]	Bending radius [mm]	Fire load [MJ/m]	Fire load [kWh/m]	PU
18292400CK		CU 7060 4P	Cca-s1a,d1,a1	4 x 2 x 0.55 (AWG23)	FRNC/LSZH	orange	SC/APC	6.8	47.7	26.4	25	0.48 MJ/m	0.14	1000 m drum