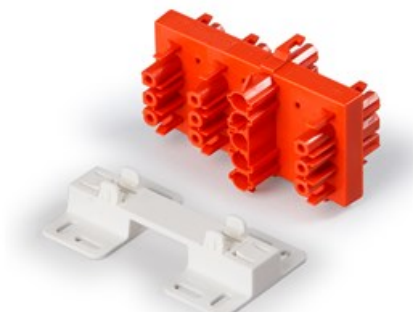


**NCD56.P****Distribution block**

Code	NCD56.P
GTIN	6418677724145
ENumber	
Name	Distribution block EnstoNet Red
Description	With distribution block NCD56.P a 3 phase supply is branched into 6 single phase outputs. 3 phase supply can be continued through the block to e.g. the following distribution block. The distribution block can be fixed to e.g. a mounting plate with the mounting foot supplied with the distribution block using 4 screws, max. $\varnothing$ 4.2 mm. The distribution block does also partly fit into a min. 70 mm wide lighting track. In this case no separate mounting foot is needed.
Vendor	Ensto Finland Oy ®CECER

**Technical specification****Dimensions**

Weight: 117 g

Temperatures

Max. operating temperature: +70 °C

Min. installation temperature: +5 °C

Min. operating temperature: -30 °C (without mechanical stress)

Materials

Material: Polyamide 66

Colors

Color: Red

Certificates

Standards: EN 61535

Ratings

Rated voltage: 250 ... 400 V
Degree of protection: IP20
Flammability rating: UL 94 V-2
Rated current: 20 A
ETIM class: EC002567

ETIM

ETIM

Width: 51 mm
Length: 45 mm
Height: 100 mm
Degree of protection (IP): IP20
Material housing: Polyamide
Nominal rated current: 20 A
Number of outputs: 7
Number of inputs: 1
Halogen free: true
Number of poles: 6
Nominal rated voltage: 250 V
Locking mechanism: Integrated in plug-in connector
Mechanical coding: true
Contact material: CuZn
Pollution degree: 2
Colour coding/contact insert: Red
Max. continuous temperature resistance contact part: 70 °C
Max. continuous temperature resistance strain relief: 70 °C
Surface finish contacts: Silver-plated
Rated surge voltage: 4 kV
Type of distributor: Distribution terminal block
Type of integrated switching: None
Mounting possibility: With separate adapter

Packaging

Default package

Unit: PCS
Size: 10
Length: 220 mm
Width: 220 mm
Height: 125 mm
Weight (brt): 1.336 kg

Volume: 6.05

Pallet package

Unit: PCS

Size: 1250

Length: 1200 mm

Width: 800 mm

Height: 1025 mm

Weight (brt): 192 kg

Volume: 984