


# Indoor / Outdoor Lockable Distribution Box IP65 Rated Supports up to 4 Fibres

V.3.3



Fibre cable and patch cords available separately

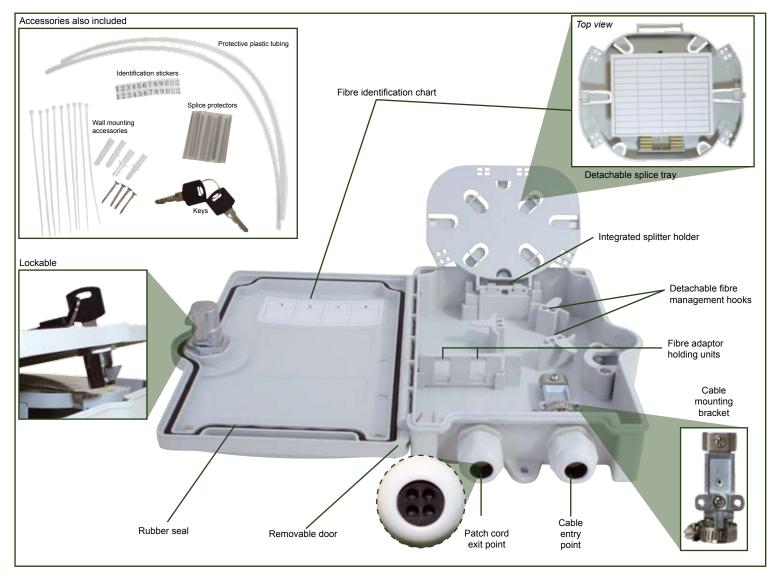





+44 (0) 870 127 3331







# Indoor / Outdoor Lockable Distribution Box IP65 Rated Supports up to 4 Fibres

V/33

## Description

This Lockable IP65 distribution box offers the ability to terminate 4 fibres housed in a strong robust ABS enclosure for indoor and outdoor applications.

With the ability to use SC Simplex and LC Duplex adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the interchangeable adaptors the enclosure also offers up to 4 exit points for patching cables and 1 standard cable entry point for loose tube, tight buffer, pre-terminated and steel tape armoured cable.

Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front door allowing for quick and easy installation.

#### Features/Benefits

- Up to 4 fibres
- Removable splice tray for easy installation
- Multiple adaptor options available
- 2 adaptor positions
- ► IP 65
- Accepts loose tube, distribution and pre-terminated cables
- ► Integrated bend radius protection
- Sealing glands for up to 4 exiting cables + 1 incoming cable
- Lockable door
- ► Removable door for ease of installation
- ROHS, REACH & SvHC compliant
- Supplied with 4 heatshrink splice protectors
- ► Supplied with transit tubing
- Supplied with wall fixings and tie wraps

### **Applications**

- Data centres, premise installations, telecommunication networks
- Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- Data communication and telecommunication networks
- Indoor/outdoor applications

#### Ordering Information

DESCRIPTION	PART NO.
Lockable IP65 Indoor/Outdoor Distribution Box	W25XXX00

### Technical Specification

PRODUCT SPECIFICATION	
Height	210mm
Width	156mm
Depth	48mm
Net weight	0.51kg
Packed weight	0.59kg
Packaged dimensions	215(H) x 157(W) x 60(D)mm
IP rating	IP65
Suitable for adaptor type	SC Simplex LC Duplex
Number of fibres	2 to 4*
Number of ports	2
Cable entry 20mm	1
Cable exit 20mm	1
Material	ABS
Colour	White
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC

\*LC Duplex must be used when installing more than 2 fibres



+44 (0) 870 127 3331



