


Data sheet

ID	SLB-D WH
Description	outlet box
Properties	for Starline-trunkings
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating

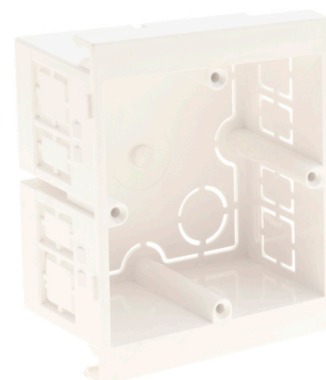

UV-Level

L2

Art. no.	Dimensions	Number of units	Small Package	Large Package
040 223	80 x 85 x 28 mm	1	20 pc	160 pc

Further technical details

Details

Mounting method box	Front
Model	Open
Mounting method installation unit	Screwing
Strain relief possibility	True
With connection space	True
Material	PVC-U

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.