

## UT-2USB


The UT-2USB operates as an electrical converter between USB and RS485 communication interfaces. It can be used for programming of single access controller or the whole network (subsystem) of access controllers connected RS485 bus. UT-2USB device enables bidirectional data transmission between access control devices and management software installed at PC.



**Application:**

- Configuration and communication within RACS 4 access control system

**UT-2USB view and dimensions**

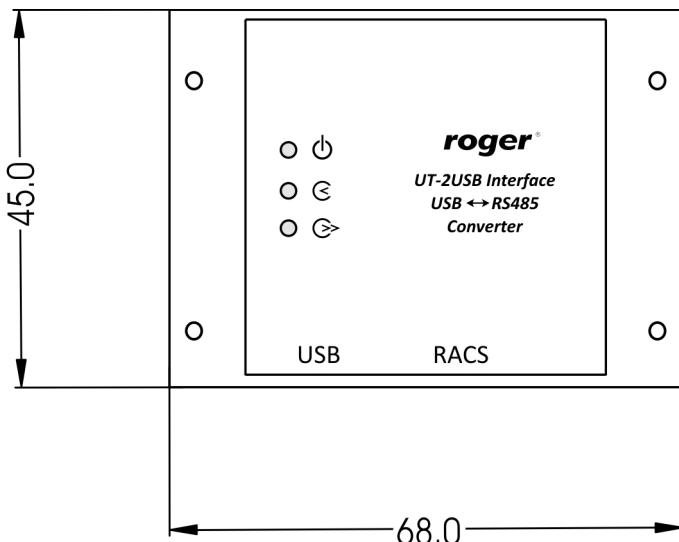

Available versions and symbols	
Symbol	Description
<b>UT-2USB</b>	Standard version

ROGER sp.j  
Gościszewo 59  
82-400 Sztum  
Poland

**T.** +48 55 272 0132  
**F.** +48 55 272 0133  
**E.** roger@roger.pl  
**I.** www.roger.pl

Technical Specification	
Parameter	Value
<b>Power supply</b>	5 VDC direct from USB Port
<b>Average current consumption</b>	40 mA
<b>Communication speed</b>	0-115.2 kbit/s
<b>Max. communication distance for USB</b>	5 meters
<b>Max. communication distance for RS485</b>	1200 meters
<b>Relative humidity</b>	10 to 95% (non-condensing)
<b>Dimensions</b>	68 x 45 x 23 mm (WxHxD)
<b>Waga</b>	≈35g
<b>Weight</b>	CE