



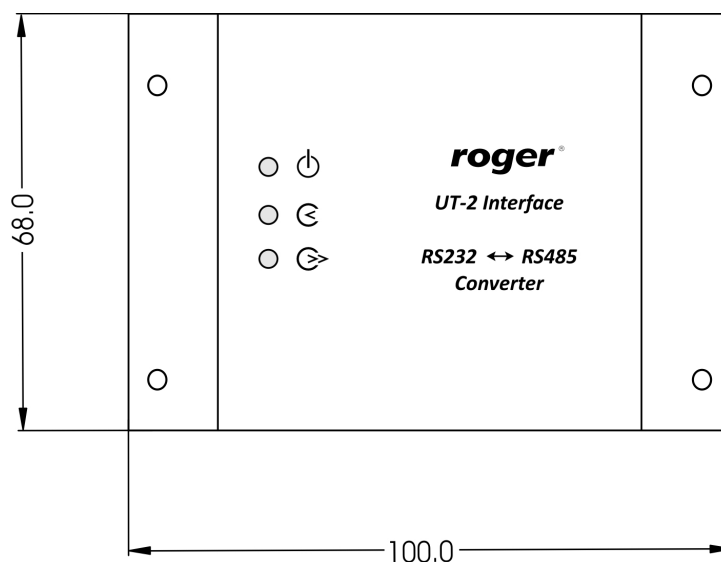
UT-2

The UT-2 operates as an electrical converter between RS232 and RS485 communication interfaces. It can be used for programming of single access controller or the whole network (subsystem) of access controllers connected RS485 bus. UT-2 device enables bidirectional data transmission between access control devices and management software installed at PC.



Application:

- Configuration and communication within RACS 4 access control system
- Universal RS232-RS485 converter for general applications by third parties
- Integration of RACS 4 system with Integra alarm modules (Satel)

UT-2 view and dimensions

Available versions and symbols	
Symbol	Description
UT-2	Standard version

Technical Specification	
Parameter	Value
Power supply	10...15VDC
Average current consumption	60mA
Maximum current consumption	150mA
Operating temp. range	0-55°C
Relative humidity	10 to 95% (non-condensing)
Dimensions	100 x 68 x 35 mm (WxHxD)
Weight	≈80g
Certificates	CE

ROGER sp.j
Gościszewo 59
82-400 Sztum
Poland

T. +48 55 272 0132
F. +48 55 272 0133
E. roger@roger.pl
I. www.roger.pl