



UT-4


The UT-4 interface enables communication with various devices equipped with RS232 serial port through a computer network. The device is equipped with serial port which can be configured as RS232, RS422 or RS485 and with 10/100 Mbit/s Ethernet port for communication within computer network.



Characteristics:

- LAN/WAN 100/10Mbit/s operation
- Static or dynamic IP address
- Virtual Serial Port can be configured in the device and it can be used in RACS 4 system or third party applications
- Plastic enclosure adapted for installation on flat surface e.g. wall
- Advanced Digi Connect ME module from Digi Corp

UT-4 view and dimensions

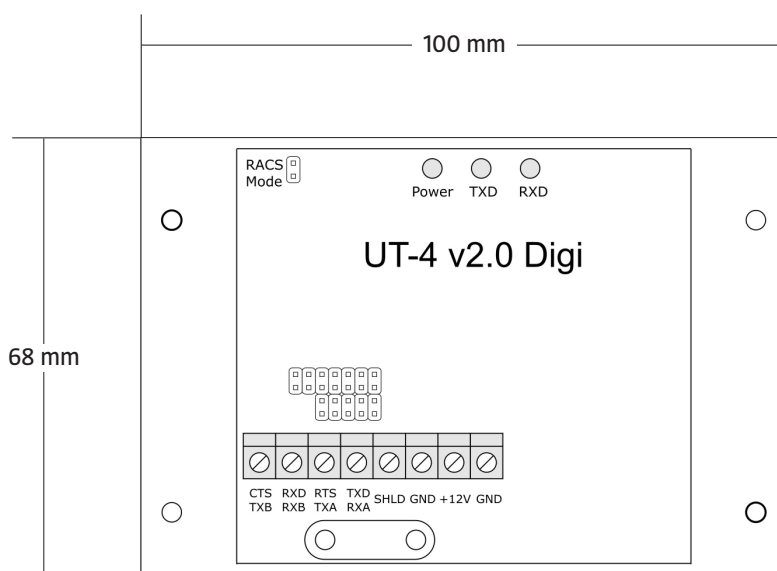

Available versions and symbols	
Symbol	Description
UT-4	Standard version

Technical Specification	
Parameter	Value
Power supply	10..15 VDC
Current consumption	average 75mA, max. 150mA
Serial interface	RS232, lines: RXD, TXD, RTS, CTS, GND RS422, lines: TXA, TXB, RXA, RXB RS485, lines: A and B
Ethernet standard	10/100 Mbit/s Ethernet
Operating temperature	0..55°C
Relative humidity	10 to 95% (non-condensing)
Dimensions	100 x 68 x 35 mm (WxHxD)
Weight	≈110g
Certificates	CE

ROGER sp.j
Gościszewo 59
82-400 Sztum
Poland

T. +48 55 272 0132
F. +48 55 272 0133
E. roger@roger.pl
I. www.roger.pl