


CODE: **AWO361** v1.1
NAME: **LCD/B/W**

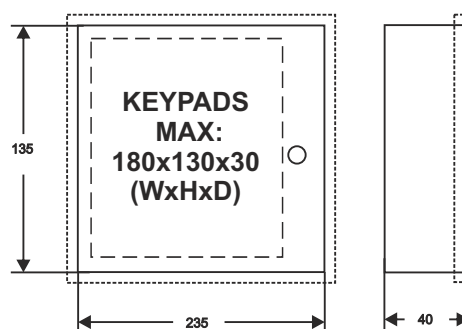

DESTINATION

DSC

KEYPADS: RK 5506, RK 5508Z, RK 5532, LCD-600, LCD-4500, LCD-5500, RK 5500Z

FBII

KEYPADS: XK 206, STOCK 406, 6805, XL 4600 SM, XL 4612 SM, XK7LC, XK708

SCANTRONIC

KEYPADS: KP600L, EKP1, SIC-1L, KP 2000

ROKONET

KEYPADS: RP 296 KLC, RP 296 KLS, RP 296 KL8, RP 296 KL16

PARADOX

KEYPADS: 626, 629, 633, 639

NAPCO

KEYPADS: RP1054E, RP1016E, RP1000E, GEM-RP2AS, GEM-RP3S, GSM-RP8, GEM-RP1Cae2, GEM-RP2Ase2, GEM3Se2

SUMMIT

KEYPADS: LED 3106, LCD 3108, PENTA

SATEL

KEYPADS: CA-4V KLED, CA-6 KLED, CA 10 KLED, CA-64 S, CA-64 SZ, SZW-02

CADDX NETWORK

KEYPADS: NX-108E, NX-116E, NX-124E (LED)

TECHNICAL DATA

Casing dimensions:	internal: W=235, H=135, D=40 external: W1=240, H1=140[mm, +/-2]
Keypads dimensions:	max: W=180, H=130, D=30 [mm, +/-2]
Weight net/gross:	0,90kg / 1,00kg [+/-0,1kg]
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	lockable (MR 008 - different code)
Notes :	removable back mounting plate (without holes) keypad status preview - inspection window
Certification, declaration:	RoHS