


CODE: **AWO510 v1.6**
NAME: **17/TRZ40/M-F**

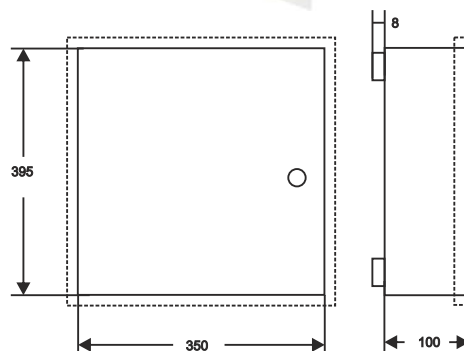

DESTINATION

DSC: 1) PC1616, 1832, 1864, 4020+ 3x 5108 (4108, 5208, 5100, 4116)

Modules: PC5204, 5400, 5200, 5580, 4216, 4204+ 3x 5108 (4108, 5208, 5100, 4116)

PARADOX: 1) E55, 65, 728ULT, SP5500, 6000, 7000, EVO48, 192+ZX8 (ZX4, APR3- ADM2, APR3- HUB2)

RISCO: 1) PRO24, 116, 128, 140+ RP296EPS

SATEL: 1) CA4V1, 5,6,10, VERSA5, 10, 15, INTEGRA 24, 32+ 2x CA64E (CA10E, SM, MST1)
2) INTEGRA 64/128 + CA64E(CA10E, SM, MST1)

Modules: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS- R, OPS- ROC, VGM16, SR, PTSA)+ 2x CA64E (CA10E, MST1, SM)

PYRONIX: 1) Matrix 424, 6, 816, 832, 832+

TEXECOM: 1) Premier 412, 816, 832, 48, 88, 168, 640

TELMOR: 1) TCA-824+ TEX 800

ROGER: 1) PR402, CPR 32-SE

EBS: 1) PX202A

PULSAR: 1) MS1512, MSR1512, MSRK1512
2) MS2512, MSR2512, MSRK2512

TECHNICAL DATA

Dimensions:	internal: W=350, H=395, D=100 external: W1=385, H1=430, D1=110 [mm, +/-2]
Weight net/gross:	5,40kg / 5,85kg [+/-0,1kg]
Battery space:	17Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRZ 40VA/16V/18V in the case of PC/ABS in class UL94-V0, IP43
Power supply:	230V/AC (-15%/+10%), 50Hz, 200mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2.2A or I2=2.0A (max.)
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Closing:	lockable (MR 008 - different code)
Notes:	flush type casing, removable back mounting plate and front frame, easy door removal, additional side mounting plate(s), distance from wall - 8mm
Certification, declaration:	CE, RoHS