


CODE: AWT 268 v 1.1
NAME: TRANSFORMER TRZ 20/16/18

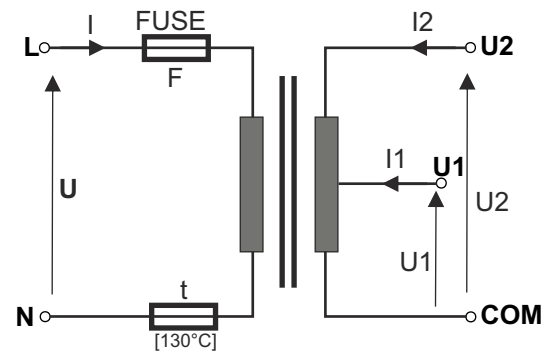

Tab.1

Technical parameters of transformers							
CODE NAME	S	U	I	U1 or U2	I1 or I2	F	t
AWT268 TRZ 20/16/18	20VA	230V/AC	0,12A	16V or 18V	1,2A or 1,0A	T 200mA/250V	130°C

USE:

The transformers are destined for supplying devices requiring AC voltage U1 or U2.

TECHNICAL DATA

Casing:	PC/ABS in class UL 94 V-0, IP43
Dimensions:	Fig.1 TRZ 20VA
Net/ gross weight:	0,84kg / 0,90kg [+/-0,1kg] TRZ 20VA
Installation:	installation bus TH35/TS35 (DIN) or cheese screw x 4 (flat surface),with the holder AWO466 for TRZ20VA
Supply voltage:	230 V/AC (-15%+10%), 50Hz
Current consumption I:	tab.1.
Output voltage U1or U2:	tab.1.
Rated power S:	tab.1.
Rated output current I1 or /I2:	tab.1.
Short-circuit protection F:	fuse tab.1.
Over-load protection t:	fuse tab.1. / temperature limit fuse 130°C-non resetable
Operating conditions:	2nd environmental class, -10°C+ 40°C, Ta 40 B
Certificates, declarations:	CE, RoHS
Remarks:	leads on connectors AWG 24-12 2,5mm²

Dimensions of transformers series: TRZ 20VA

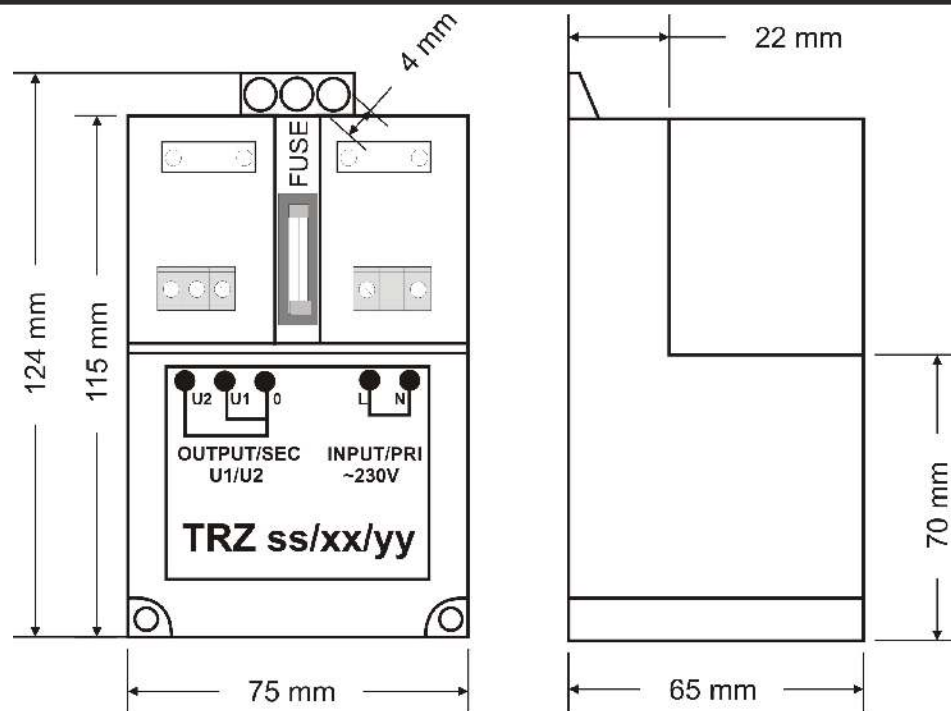


Fig.1