


MP-1

RELAY MODULE

Wide range of security systems related accessories is an addition to SATEL's base product lines, which is intended to provide a better customization for the whole project.

FEATURES

- high-current AC/DC appliance control
- triggering with low-current OC outputs
- 4 relays
- 5 fuses

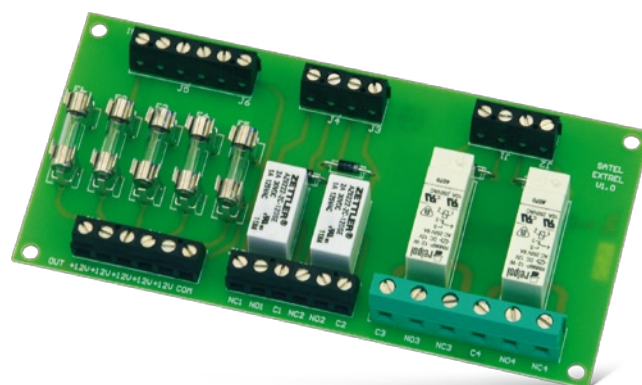

TECHNICAL SPECIFICATION

Fuse (5 pc.)	WTA-T 400 mA
Nominal (control) voltage of relay coil	12 V \pm 3 V DC
Maximum voltage of R1, R2 relay contacts	48 V AC/DC
Maximum voltage of R3, R4 relay contacts	400 V AC / 250 V DC
Continuous current-carrying capacity of R1, R2 relay contacts	4 A
Continuous current-carrying capacity of R3, R4 relay contacts	8 A
Current-carrying capacity when changing contacts of R1, R2 relays	2.5 A
Ambient temperature	-20°C...+70°C
Weight	106 g