


E1W Premium brass gland pack for single wire armoured cable

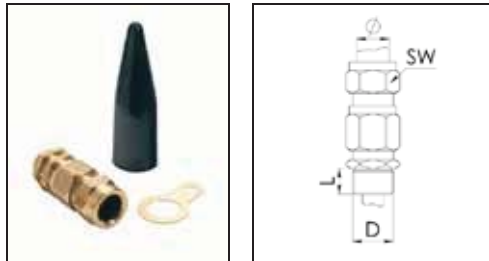

Protection class to EN 60 529: IP 66 / IP 68, 3 bar with fibre or polyamide seal

Temperature range: -20°C to 80°C

Material: Brass

Equipment: - For indoor or outdoor use with all types of SWA extruded bending cable
- Complete with steel locknuts, brass washers and shrouds. Shrouds made out of zero halogen material (LSF)

E1W Premium Messing Verschraubungsset für armierte Kabel, Einzeladerschirmung

halogen

Schutzart gemäß EN 60 529: IP 66 / IP 68, 3 bar mit Mineralfaser oder Polyamid Anschlussgewindedichtring

Einsatztemperatur: -20°C bis 80°C

Material: Messing

Ausstattung: - Für Innen- und Außenanwendung geeignet, für alle armierte Kabel mit Einzeladerschirmung
- Komplett mit Stahl-Gegenmutter, Messing-Scheiben und Schutzfüllen, Schutzfüllen sind aus halogenfreiem Material hergestellt (LSF)

Type	WISKA-No. bright / blank							TL
			mm	mm	mm	mm	mm	mm
E1W20S Pack	50101655	2	M 20x1,5	15	8 · 11,8	12,9 · 15,8	24	57
E1W20 Pack	50101656	2	M 20x1,5	15	11,0 · 13,8	15,5 · 20,8	30	58
E1W25 Pack	50101657	2	M 25x1,5	15	13,0 · 19,8	20,3 · 27,5	38	61
E1W32 Pack	50101658	2	M 32x1,5	15	19,0 · 26,4	26,7 · 33,5	46	65
E1W40 Pack	50101659	1	M 40x1,5	20	25,0 · 32,4	33,0 · 40,9	55	64,5
E1W50 Pack	50101660	1	M 50x1,5	20	31,5 · 38,0	39,4 · 46,3	60	77,5
E1W50L Pack	50101661	1	M 50x1,5	20	36,5 · 44,0	45,7 · 52,6	65	77,5
E1W63S Pack	50101662	1	M 63x1,5	20	42,5 · 49,0	52,1 · 61,5	75	63
E1W63L Pack	50101663	1	M 63x1,5	20	48,5 · 55,5	58,4 · 65,3	80	83
E1W75S Pack	50101664	1	M 75x1,5	20	54,5 · 62,0	64,8 · 73,0	90	88
E1W75 Pack	50101665	1	M 75x1,5	20	60,5 · 67,0	71,0 · 78,0	95	88