



SPRINT EMC cable glands, metric, contact spring insert, brass nickel-plated

SPRINT



- Protection class to EN 60 529:** IP 68 to 5 bar (30 min)
Protection class to DIN 40 050-T9: IP 69K
Temperature range: -40°C to 100°C, interm. up to approx. 120°C
Material: - Cable gland: brass nickel-plated
 - Clamping cage: polyamide
 - Contact spring insert: CuBe
 - Gasket: EPDM
Equipment: - EMC gland with contact spring insert
 - Continuous EMC protection
 - Maximum traction relief through WISKA patent lamella
 - Seal-tight to enclosure rack through additional EPDM sealing ring
 - Same sealing range and key width on all SPRINT-glands

SPRINT EMV Kabelverschraubungen, metrisch Kontaktfedereinsatz, Messing vernickelt

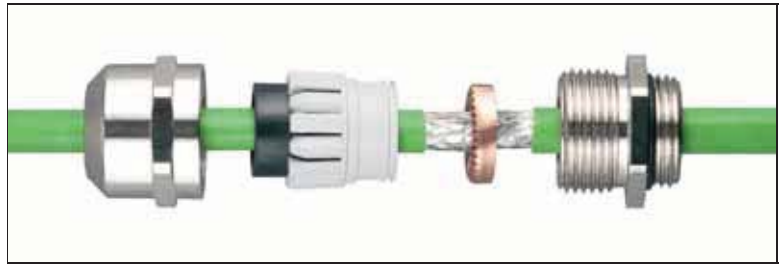

- Schutzart gemäß EN 60 529:** IP 68 bis 5 bar (30 min)
Schutzart gemäß DIN 40 050-T9: IP 69K
Einsatztemperatur: -40°C bis 100°C, kurzzeitig bis ca. 120°C
Material: - Verschraubung: Messing vernickelt
 - Klemmkäfig: Polyamid
 - Kontaktfedereinsatz: CuBe
 - Dichtung: EPDM
Ausstattung: - EMV-Verschraubung mit Kontaktfedereinsatz
 - Dauerhafte Kontaktierung des Schirmgeflechts
 - Optimale Abdichtung und Zugentlastung durch patentiertes WISKA-Lamellensystem
 - Abdichtung am Gehäuse durch zusätzlichen EPDM O-Ring
 - Gleiche Dichtbereiche und Schlüsselweiten für alle SPRINT-Verschraubungen

Type	WISKA-No.							TL
			mm	mm	mm	mm	mm	mm
EMSKV 12 EMV-C	10101920	50	M 12x1,5	5	3 · 7	5	16	23 · 30
EMSKV 16 EMV-C	10101921	50	M 16x1,5	5	4,5 · 10	7,5	20	26 · 34
EMSKV 20 EMV-C	10101922	50	M 20x1,5	6	6 · 13	9,5	24	29 · 37
EMSKV 25 EMV-C	10101923	50	M 25x1,5	7	9 · 17	14,5	29	33 · 42
EMSKV 32 EMV-C	10101924	25	M 32x1,5	8	13 · 21	20	36	36 · 44
EMSKV 40 EMV-C	10101925	10	M 40x1,5	8	16 · 28	26	46	44 · 55
EMSKV 50 EMV-C	10101926	10	M 50x1,5	9	21 · 35	33	55	51 · 62
EMSKV 63 EMV-C	10101927	10	M 63x1,5	10	34 · 48	45	68	56 · 67
EMSKV 75 EMV-C	10101928	1	M 75x1,5	12	48 · 62	58	82	67 · 81

Recommended accessories:
 Empfohlenes Zubehör:



EMMU-EMV
 Page / Seite 124