

MAH8800 & MAH1100 Series Pedestal Enclosures

he new Channell MAH Profile Series Pedestal Enclosures are the industry's most cost-effective enclosure system. Precision engineered, they are manufactured of high performance thermoplastic material for the utmost protection of equipment and maximum service life.

The MAH Profile Series Enclosure is low cost and an excellent value. It is supplied with a full complement of standard features, which includes Self-Lock® security covers and factory installed bracketry, enhancing the value of this innovative product. In addition, the unique design of the enclosure provides an attractive profile for residential installations.

Applications

These free-breathing pedestals are designed for use in buried and underground cable plant installations for distribution tap and splicing applications.

Features

- Complete 360° working access
- Non-corrosive, lightweight and rugged
- Universal terminal block mounting plate 2-point Self-Lock® security
- Designed to the requirements of Telcordia Spec GR-13-CORE
- Winter drop access door and drop wire channel standard



MAH8800 shown with splice ladder loop bundle support installed




MAH8815 Shown



MAH8800 shown with fiber tap installed

Specifications

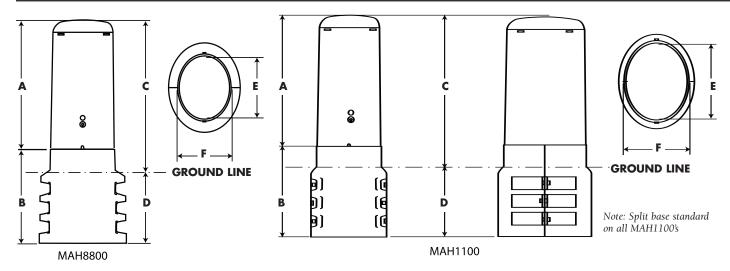

Dimensions:								
	А	В	С	D	Е	F		
MAH8815	15.0"	13.0"	17.5"	10.0"	8.0"	6.0"		
	381.0mm	330.2mm	444.5mm	254.0mm	203.2mm	152.4mm		
MAH1115	15.0"	13.0"	17.5"	10.0"	10.875"	8.25"		
	381.0mm	330.2mm	444.5mm	254.0mm	276.2mm	209.55mm		

Conduit Capacity				Innerduct Capacity				
Model	4"	3" 2"		1″	1-1/4"	1-1/2"	2″	
8800	2	2	8	28	18	11	7	
1100	3	6	13	49	32	25	14	

Ordering Information

		<u>MAH</u>	XX	XX	<u>CX</u>	BX	<u>LH1</u>	AXX
Multiple Access Housi	ng ———							
Diameter —								
88 – 8" (203.2mm) diar	neter oval							
11 – 11" (279.4mm) dia	ameter oval							
Length —								
15 – 15" (381mm) heig	ht (Note: 26" (660.4mm)	height also avail	able)					
Color —								
C1 – Light Green	C4 – Brown							
C2 – Beige	C5 – Grey							
C3 – Dark Green								
Bracket Option ———								
BX – Standard and custo	om bracketry available ba	ased on application	n requirer	nents.				
Locking Option —								
LX – Standard and custo	om security options avail-	able based on ap	plication re	quirement	S.			
Option —								

A01 – Condensation Vented

A02 – Non-Vented Bell Jar Cover



CHANNELL

USA: Channell Commercial Corporation, Temecula, CA • Tel.800.423.1863 • Fax.951.296.2322

CANADA: Channell Canada, Inc. • Tel. 905.565.1700 • Fax. 905.565.8080

EUROPE, MIDDLE EAST, AFRICA: Channell Ltd., London, UK • Tel. 44.1689.871522 • Fax 44.1689.833428

AUSTRALIA, ASIA, PACIFIC RIM: Channell Pty. Ltd., Sydney, Australia • Tel.61.2.9738.8277 • Fax.61.2 9738.9763

WORLDWIDE HEADQUARTERS: Channell Commercial Corporation • 951.719.2600 • 26040 Ynez Road • P.O. Box 9022 • Temecula, CA 92589-9022, USA

www.channellcomm.com