

GCAG

Multi Loose Tube Cables
Universal – Indoor / Outdoor
A/I-DQ(ZN)H

Ordering Information

Belden European Part Numbers

Fibre type / count	4	6	8	12	18	24	30	36
62.5/125-OM1	GCAG104	GCAG106	GCAG108	GCAG112	GCAG118	GCAG124	GCAG130	GCAG136
50/125-OM2 BW 600/1200	GCAG204	GCAG206	GCAG208	GCAG212	GCAG218	GCAG224	GCAG230	GCAG236
50/125-OM3	GCAG304	GCAG306	GCAG308	GCAG312	GCAG318	GCAG324	GCAG330	GCAG336
50/125-OM2e	GCAG404	GCAG406	GCAG408	GCAG412	GCAG418	GCAG424	GCAG430	GCAG436
50/125-OM2 BW 500/500	GCAG504	GCAG506	GCAG508	GCAG512	GCAG518	GCAG524	GCAG530	GCAG536
50/125-OM4	GCAG604	GCAG606	GCAG608	GCAG612	GCAG618	GCAG624	GCAG630	GCAG636
9/125 ITU G.655	GCAG704	GCAG706	GCAG708	GCAG712	GCAG718	GCAG724	GCAG730	GCAG736
9/125 ITU G.652D-OS2	GCAG804	GCAG806	GCAG808	GCAG812	GCAG818	GCAG824	GCAG830	GCAG836
Std. plywood reel (non-returnable)	Ø 1000 * 530 mm 18 kg							
Std. delivery length	2100 ± 100m							


Applications

- For **outdoor and indoor** use in structured (data) wiring systems such as (**campus backbone**).
- For **outdoor and indoor** use in networks for telecom, cable TV and/or broadcast.
- Easy to install in ducts, tunnels and trenches by means of compressed air or pulling wire.
- Suitable for direct burial.

Features & Benefits

- **Installation friendly dry interstices** between the loose tubes.
- **Predicted lifetime > 30 years.**

Construction & Dimensions

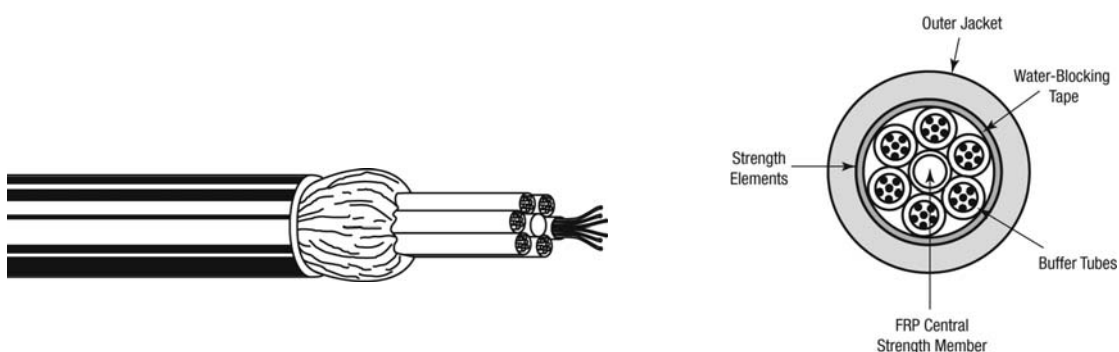

Cable Specifications (construction in accordance with IEC 60794)

1. Dielectric central element of glass reinforced plastic (GRP), also as protection against kinks, surrounded by swelling yarns.
2. Jelly filled (non-dripping and silicon-free) loose tubes with primary coated optical fibres ($\varnothing 250 \pm 15 \mu\text{m}$).
Individually colour coded optical fibres: red – green – blue – yellow – violet – pink.
3. The loose tubes are stranded around the central element, if necessary with fillers (PE-natural), surrounded by swelling tape.
Colour coding of the loose tubes: 1. red – 2. green – rest white.
4. Swellable (for the longitudinal watertightness) aramid yarns as strength members.
5. Black UV resistant FRNC/LSNH outer jacket.
Identification: BELDEN OFC – “cable type” – “number x fibre type” + date-, meter- and P/N marking.

Mechanical Data

No. of fibres	Max. 36
Cable core	6 tubes
\varnothing Central element (mm)	2.1
\varnothing Loose tube (mm)	1.9
\varnothing nom./max. (mm)	10.3 / 10.6
Energy of flame (kJ/m)	2100
Weight (kg/km)	98

Optical Characteristics

Characteristics (cabled) Single-Mode – Matched-Cladded optical fibres according to ITU.

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field /Cladding Diameter (µm)	Wave-length (nm)	Attenuation average/ max. (dB/km)	Dispersion (ps/(nm·km))	PMD (ps/km)	Cable Cut-off Wave-length (nm)
8	9/125 G.652D OS2	9.2 ± 0.4 125 ± 0.7	1310 1550	0.32 / 0.40 0.21 / 0.30	≤ 3.5 ≤ 18	≤ 0.2	≤ 1260
7	9/125 G.655	8.4 ± 0.6 125 ± 1	1550	0.25 / 0.30	3.5 – 8.5	≤ 0.1 ^A	≤ 1260

Note A- Link design value

Characteristics (cabled) Multi-Mode Graded-Index optical fibres according to IEC 60793

European Partnumber Coding, Position 5	Fibre-Type	Mode-Field Diameter (µm)	Wave-length (nm)	Attenuation average/ max. (db/km)	Bandwidth (MHz·km)	Ethernet Performance (m)		Num. Apert. (µm)	Refr. Index
						1G BE	10 G BE		
1	62.5/125 OM1	62.5 ± 2.5 125 ± 1	850 1300	2.7 / 3.2 0.6 / 1.1	≥ 200 ≥ 600	275 550	33 n.a.	0.275 ± 0.015	1.495 1.490
5	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.4 / 3.0 0.7 / 1.0	≥ 500 ≥ 500	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
2	50/125 OM2	50 ± 2.5 125 ± 1	850 1300	2.3 / 2.8 0.6 / 0.9	≥ 600 ≥ 1200	600 600	82 n.a.	0.20 ± 0.015	1.481 1.476
4	50/125 OM2e	50 ± 2,5 125 ± 1	850 1300	2,3 / 2,8 0,6 / 0,9	≥ 600 ≥ 1200	750 2000	110 na	0.20 ± 0.015	1,481 1,476
3	50/125 OM3	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 1500 ≥ 500	900 550	300 n.a.	0.20 ± 0.015	1.482 1.477
6	50/125 OM4	50 ± 2.5 125 ± 1	850 1300	2.5 / 3.0 0.5 / 1.0	≥ 6000 ≥ 500	900 550	550 n.a.	0.20 ± 0.015	1.482 1.477

A test report (attenuation) is supplied with each delivery.

Mechanical, Physical and/or Environmental Characteristics

Requirements		
Temperature range according to IEC 60794-1-2-F1	Transport/storage	-30 to + 70 °C
	Installation	-5 to + 50 °C
	Operation	-30 to + 70 °C
Pulling tension according to IEC 60794-1-2-E1	Long term	≤ 3000 N
	Short term	≤ 6000 N
Bending radii for fibres and tubes	Installation/operation	>25 mm
Watertightness according to IEC 60794-1-2-F5		Pass
Crush resistance according to IEC 60794-1-2-E3	Cable	≤ 20 KN/m
Bending radii cable	Static according to IEC 60794-1-2-E11	15 x Ø
	Dynamic according to IEC 60794-1-2-E6	20 x Ø
Flame retardancy according to	IEC 60332-3-22 (EN 50266-2-2)	Pass
	IEC 61034 (EN 50268)	Pass
Halogen-free	according to IEC 60754-2 (EN 50267-2-2) Corrosivity	pH ≥ 3.5 - μS/cm ≤ 100

Guide to installation and handling

- When laying and installing optical fibre cables it is **vitaly important not to exceed the specified values** set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used. The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Options

- Cables for outdoor use.
- **Non-standard cable constructions**, colours, details and/or additional information regarding specifications are available on request.

Revision

Rev.	Description	Date	Init.
02	Changed energy	22/11/10	TvR
Date: 15/02/10		Page 1 of 1	
Orig.: SN		Review:	
			Part Number: GCAG