


Speedway 6 Segment Fibre Management Spool

Description

Introducing the revolutionary FibreFab Speedway bend radius spool with its unrivalled ease of use and flexibility. Designed to accommodate a number of cable diameters up to 3mm. This incredibly versatile accessory allows the installer to use the complete unit for fibre storage or break it down into up to 6 individual components suitable for fibre management/routing. These can then be mounted via adhesive foam pads or via screws. It allows two channels of routing aiding segregation of incoming and exiting fibre bundles. The individual spools are designed to stack up into as many units as you may require through a simple snap fit system.



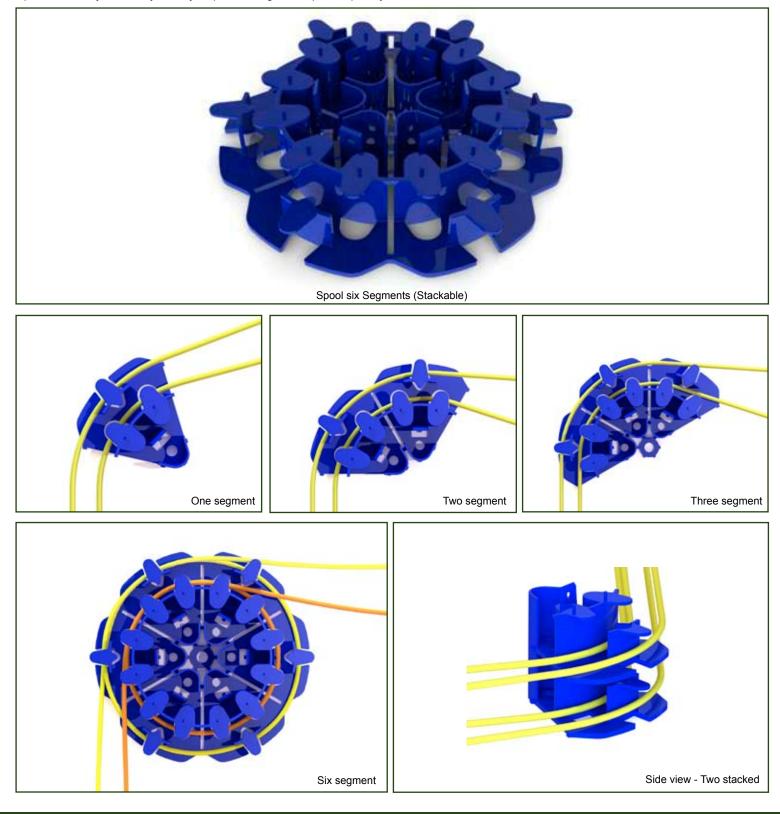

Speedway 6 Segment Fibre Management Spool

Features/Benefits

- Fibre pathway allows easy storage of excess fibre and multidirectional routing of entry and exit fibres
- Allows storage of 250µm, 900µm up to 3mm fibre cabling
- Minimum 30mm Bend Radius
- Can be split in to six separate sections
- Clips together allowing multiple stacks to be formed
- Mountable via central hole by screw, or double sided foam adhesive pad

Applications

- Fibre management
- Internal & External
- Wall Boxes
- Patch Panels

Technical Specification

DESCRIPTION	
Diameter	Max 96mm
Height - Individual	22mm with Adhesive pad, 21mm without
Height – 2 Stacked	37mm with Adhesive pad, 36mm without
Net weight	27g
Packaged weight	27g
Material	ABS
Colour	Blue
Operating temperature	-40°c to +50°c
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173
Compliant to	IEC60304, IEC61754,EN297-1 RoHS, Reach/SVHC

Ordering Information

DESCRIPTION	PART NO.
Speedway Bend Radius Spool	SPOOL6

Design Registration Number 001274211

