

W14 - Slimline Wall Box

V.3.2

Description


The slimline wall enclosure in its basic form is supplied unloaded with a 12 port ST plate installed. The enclosure can be pre-loaded with the required adaptor and a splice kit, or pre-loaded ST/FC pigtails to meet your project needs.

Features/Benefits

- ▶ Protected patch cord exit
- ▶ Ultra slim design reduces required space
- ▶ 3 point embossed wall mount for uneven surfaces
- ▶ Cable entry and exit points can be knocked out to suit installation

Applications

- ▶ Internal application
- ▶ Data Centre or telecommunications networks
- ▶ For use in multi dwelling units or demarcation points within a network

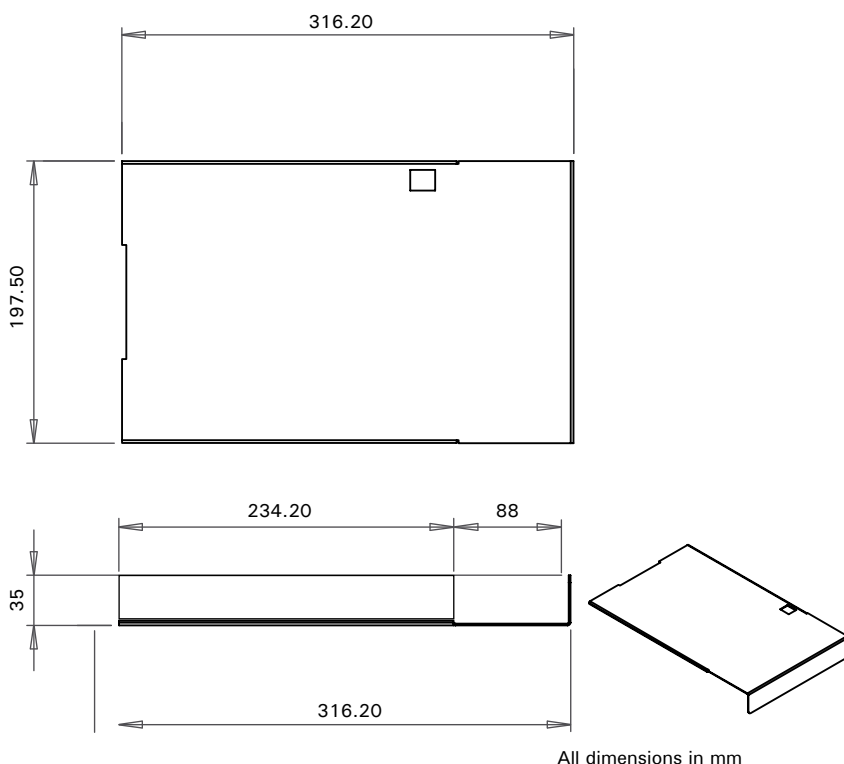

+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com

W14 - Slimline Wall Box

Technical Specification

Slimline Wall Box	
Height	197mm
Width	316mm
Depth	35mm
Net Weight	1.5kg
Package Dimensions	205mm (W) x 325mm (L) x 45mm (H)
IP Rating	IP20
Suitable for adaptor type	ST/FC
Number of doors	1
Cable entry 20mm	3
Material	Cold Rolled Steel
Material thickness	1.2mm
Material coating	Electro Static Powder Coating
Colour	Grey RAL 7035
Operating temperature	-40°C to + 50°C
Compliant to	RoHS, Reach, SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

Part Number Generator



W16 - Slimline Wall Box

V.3.2

Description

The slimline wall enclosure in its basic form is supplied unloaded with 12 port SC plate installed. The enclosure can be pre-loaded with the required adaptor and a splice kit, or pre-loaded SC/LC/E2000 pigtails to meet your project needs.


Features/Benefits

- ▶ Protected patch cord exit
- ▶ Ultra slim design reduces required space
- ▶ 3 point embossed wall mount for uneven surfaces
- ▶ Cable entry and exit points can be knocked out to suit installation



Applications

- ▶ Internal application
- ▶ Data Centre or telecommunications networks
- ▶ For use in multi dwelling units or demarcation points within a network

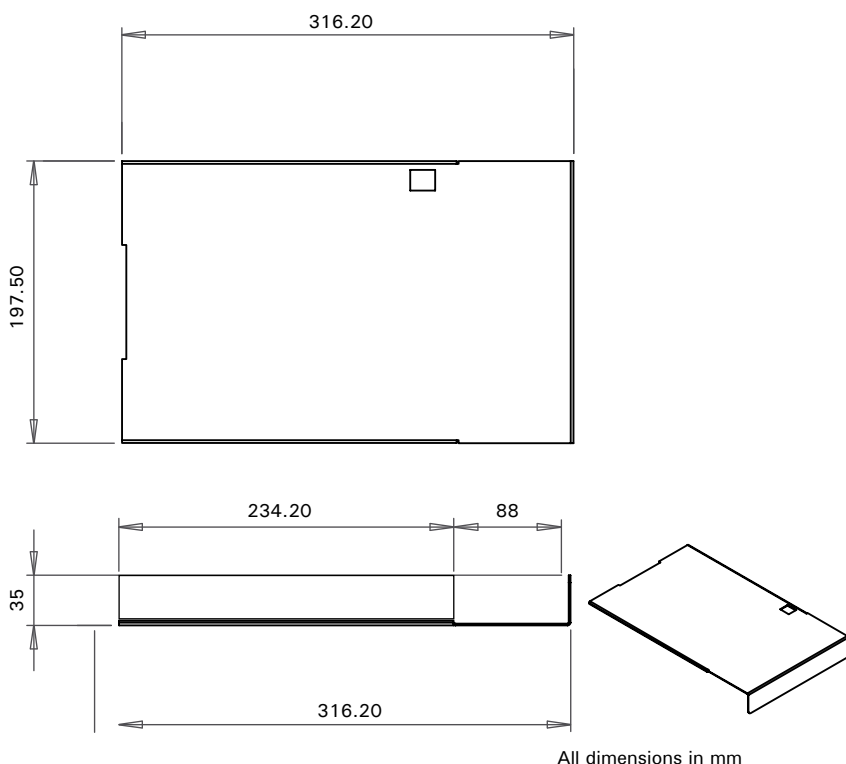

+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com

W16 - Slimline Wall Box

Technical Specification

Slimline Wall Box	
Height	197mm
Width	316mm
Depth	35mm
Net Weight	1.5kg
Package Dimensions	205mm (W) x 325mm (L) x 45mm (H)
IP Rating	IP20
Suitable for adaptor type	SC Simplex, E2000, LC Duplex
Number of doors	1
Cable entry 20mm	3
Material	Cold Rolled Steel
Material thickness	1.2mm
Material coating	Electro Static Powder Coating
Colour	Grey RAL 7035
Operating temperature	-40°C to + 50°C
Compliant to	RoHS, Reach, SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

Part Number Generator

