

# Data sheet

Part No. **SLSR**

Description

Starline trunking

compression resistance >1250 N for the supply of power, data and telecommunication cabling, versatile system in three standard trunking assemblies, all with three fully segregated compartments, further segregation of services possible by using trunking dividers, special clip-on system for robust connections between trunking body and lid (shock- and child-proof).



Colour

white, similar to RAL 9010

Fire Behaviour

non flame propagating

Standard: EN 50085, BS 4678/4

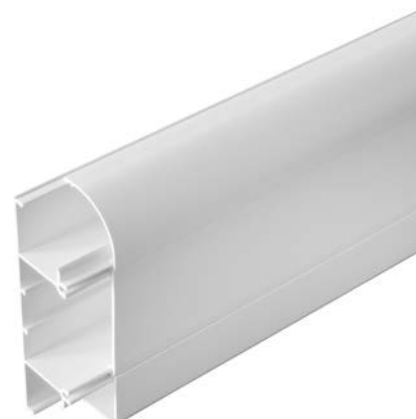

Length  
3000 mm

Working temperature  
-25 to +60 °C

Art. No.	Width x Depth	PU	PU
108522	170 x 50 mm	3 m	150 m

## Further technical details

### Details

Covers supplied with the product	True
Symmetric	False
Construction type	rectangular
Halogen free	False
Surface protection	Untreated
Construction rear wall (inner side)	Continuous C-profile
Protection film	False
With duct connector	False
Mounting perforation in base	False
Mounting method covers	Spanned
With cable fixing clip	False
Material	PVC-U

Cardboard packaging used is made from 100% waste paper and is fully recyclable, plastic packaging is fully recyclable.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, [www.dietzel-univolt.com](http://www.dietzel-univolt.com), makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.