

FAT-24A Fiber Access Terminal - 24 Cores


Description

FAT-24A fiber access termination box is able to hold up to 24 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.








Features

- Water-proof design with IP-66 Protection level.
- Integrated with splice cassette and cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1*8 and 1*16 Splitter can be installed as an option.
- Efficient cable management.
- 24 ports cable entrance for drop cable.

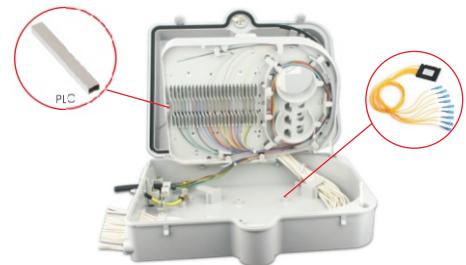

Configuration

Material	Size	Max Capacity			Installation size	Weight	Color
PC +ABS	A*B*C(mm) 320*240*100	SC 24 Ports	Box PLC 1x16(SC)	Tube PLC 1x8(SC)	D*E(mm) 206*274	1.5kg	Light Gray



Pic 1 Box Size

Pic 2 Installation Size