


SPRINT cable glands, metric, stainless steel 1.4305

SPRINT Kabelverschraubungen metrisch, Edelstahl 1.4305



- Protection class to EN 60 529:** IP 68 to 5 bar (30 min)
- Protection class to DIN 40 050-T9:** IP 69K
- Temperature range:** -40°C to 100°C, interm. up to approx. 120°C
- Material:** - Cable gland: stainless steel A2 (1.4305/AISI 303)
- Clamping cage: polyamide
- Gasket: EPDM
- Equipment:** - Maximum traction relief through WISKA patent lamella
- Seal-tight to enclosure rack through additional EPDM sealing ring
- Same sealing range on all SPRINT-glands
- Also available with reduction insert, multiple sealing insert, special sealing insert and dust-protection gasket

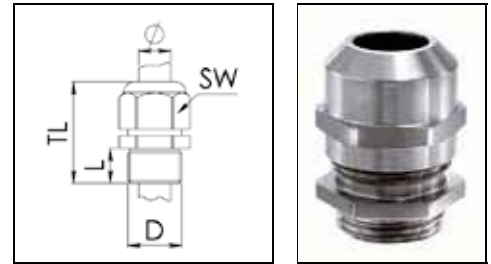

- Schutzart gemäß EN 60 529:** IP 68 bis 5 bar (30 min)
- Schutzart gemäß DIN 40 050-T9:** IP 69K
- Einsatztemperatur:** -40°C bis 100°C, kurzzeitig bis ca. 120°C
- Material:** - Verschraubung: Edelstahl A2 (1.4305/AISI 303)
- Klemmkäfig: Polyamid
- Dichtung: EPDM
- Ausstattung:** - Optimale Abdichtung und Zugentlastung durch patentiertes WISKA-Lamellensystem
- Abdichtung am Gehäuse durch zusätzlichen EPDM O-Ring
- Gleiche Dichtbereiche für alle SPRINT-Verschraubungen
- Lieferbar mit Reduzierdichteinsatz, Mehrfach- und Sonderdichtungen und Staubschutzscheibe

| Type | WISKA-No. | | | | | TL |
|----------|-----------|----|----------|----------|----|---------|
| | | | mm | mm | mm | mm |
| ESSKV 12 | 10069000 | 10 | M 12x1,5 | 3 · 7 | 17 | 23 · 30 |
| ESSKV 16 | 10069001 | 10 | M 16x1,5 | 4,5 · 10 | 22 | 26 · 34 |
| ESSKV 20 | 10069002 | 10 | M 20x1,5 | 6 · 13 | 24 | 29 · 37 |
| ESSKV 25 | 10069003 | 10 | M 25x1,5 | 9 · 17 | 30 | 33 · 42 |
| ESSKV 32 | 10069004 | 5 | M 32x1,5 | 13 · 21 | 36 | 36 · 44 |
| ESSKV 40 | 10069005 | 5 | M 40x1,5 | 16 · 28 | 46 | 44 · 55 |
| ESSKV 50 | 10069006 | 2 | M 50x1,5 | 21 · 35 | 55 | 51 · 62 |
| ESSKV 63 | 10069007 | 1 | M 63x1,5 | 34 · 48 | 68 | 56 · 67 |

Recommended accessories:
Empfohlenes Zubehör:



KUNSTSTOFF
PLASTIC

MEMBRAN
MEMBRANE

MESSING
BRASS

DIN 89280

EDELSTAHL
STAINL. STEEL

EMV
EMC

ATEX

VertGLAND

BS 6121

DICHTUNGEN
SEALINGS

WERKZEUGE
TOOLS

TECHNIK
TECHNICS

INDEX
INDEX