

DOMINO



SL2000E

SL2000E code locks identify users through PIN codes. SL2000E locks offer possibility to program up to 55 different codes and are preferred to be applied in Access Control installations. In parallel to controlling access they can also control any device or the system requiring switching of turn-on/turn-off type.




Features:

- One 1.5A/30V relay output and two transistor outputs
- Alarm signaling on the transistor output (ALARM)
- Input for connecting a Door Contact
- Input for connecting an Exit Button
- Administrator code for programming and users codes management
- Master Code for controlling the lock's mode of operation
- 55 user codes for door opening
- Possibility for temporary lock's blocking after three unsuccessful code entering attempts
- Possibility for room entrance blockage when the lock is in armed mode
- Programmable code length
- User indexing
- Non-volatile memory
- Three LED indicators and a Buzzer
- Power Supply 10-15VDC
- Tamper
- CE mark

SL2000E views and installation diagram

-  LED STATUS
-  LED OPEN
-  LED SYSTEM

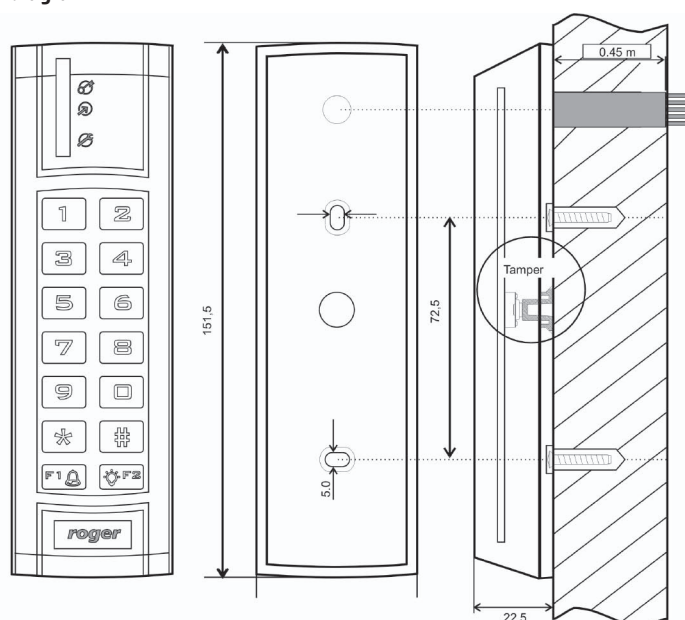

Available versions and symbols

Symbol	Description
SL2000E	Standard version

Technical Specification

Parameter	Value
Supply voltage	10-15 VDC
Current consumption (average)	25mA
Anti-sabotage protection (Tamper)	NC contact, 50mA/24V
Environmental class	Class IV, outdoor-general, temperature: -25°C- +60°C, relative humidity: 10 to 95% (non condensing)
Dimensions H x W x D	151.5 X 46 X 22.5 mm
Weight	≈150g
Approvals	CE

ROGER sp.j
Gościszewo 59
82-400 Sztum
Poland

T. +48 55 272 0132
F. +48 55 272 0133
E. roger@roger.pl
I. www.roger.pl

roger®