


## SPRINT ATEX cable glands LowTemp, metric, for increased safety, long

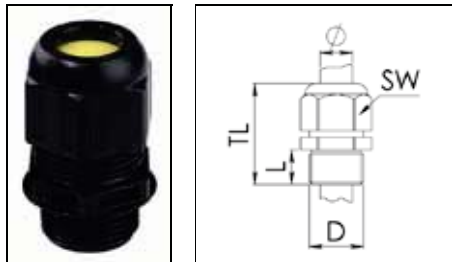

**Explosion protection:** II 2 G Ex e II

II 2 D Ex tD A21 IP68

**Certificates:** PTB 05 ATEX 1068 X

**Protection class to EN 60 529:** IP68 5bar (30min)

**Flame protection:** Glow wire test 750°C acc. to EN 60695-2-11

**Temperature range:** -60°C to 75°C

**Material:** - Cable gland: polyamide

- Gasket: silicone

**Equipment:** - incl. connection thread gasket

- Maximum traction relief through WISKA patent lamella

- Profil thread with high torque guarantees tight and permanent fit of the cap nut (vibration-safe)

- Same sealing range and key width on all SPRINT-glands

## SPRINT ATEX Kabelverschraubungen LowTemp, metrisch, erhöhte Sicherheit, lang



**Explosionsschutz:** II 2 G Ex e II

II 2 D Ex tD A21 IP68

**Bescheinigungen:** PTB 05 ATEX 1068 X

**Schutzart gemäß EN 60 529:** IP 68 bis 5 bar (30min)

**Flammwidrigkeit:** Glühdrahtprüfung 750°C gemäß EN 60695-2-11

**Einsatztemperatur:** -60°C bis 75°C

**Material:** - Verschraubung: Polyamid

- Formdichtung: Silikon

**Ausstattung:** - Inkl. Anschlussgewindedichtring

- Optimale Abdichtung und Zugentlastung durch patentiertes WISKA-Lamellensystem

- Durch Profilgewinde vibrationsfest und Schutz vor Überdrehen der Hutmutter

- Gleiche Dichtbereiche und Schlüsselweiten für alle SPRINT-Verschraubungen

| Type           | WISKA-No.<br>RAL 9005 |    |          |    |         |    | TL      |
|----------------|-----------------------|----|----------|----|---------|----|---------|
|                |                       |    | mm       | mm | mm      | mm | mm      |
| ESKE-L-e 20 LT | 10100711              | 50 | M 20x1,5 | 15 | 6 - 13  | 24 | 41 - 48 |
| ESKE-L-e 25 LT | 10100712              | 50 | M 25x1,5 | 15 | 7 - 17  | 29 | 43 - 51 |
| ESKE-L-e 32 LT | 10100713              | 25 | M 32x1,5 | 15 | 13 - 21 | 36 | 45 - 53 |
| ESKE-L-e 40 LT | 10100714              | 10 | M 40x1,5 | 18 | 17 - 28 | 46 | 58 - 71 |
| ESKE-L-e 50 LT | 10100715              | 4  | M 50x1,5 | 18 | 23 - 35 | 55 | 63 - 76 |
| ESKE-L-e 63 LT | 10100716              | 1  | M 63x1,5 | 18 | 34 - 48 | 68 | 67 - 81 |