


VentGLAND EMC, SPRINT cable glands, metric, stainless steel 1.4305 (AISI 303)



Protection class to EN 60 529: IP 68 to 0,6 bar
Protection class to DIN 40 050-T9: IP 69K
Temperature range: -40°C to 100°C, interm. up to approx. 120°C
Material: - Cable gland: stainless steel A2 (1.4305/AISI 303)
 - Clamping cage: polyamide
 - Gasket: EPDM
 - Membrane: ePTFE
Equipment: - EMC gland with inserts according to DIN 89345
 - Continuous EMC protection due to earthing cones
 - A micro-porous, liquid-tight and breathable ePTFE membrane as an integrated element of the cable gland
 - Maximum traction relief through WISKA patent lamella
 - Seal-tight to enclosure rack through additional EPDM sealing ring
 - Same sealing range on all SPRINT-glands
 - Also available with reduction insert, multiple sealing insert, special sealing insert and dust-protection gasket

VentGLAND EMV, SPRINT Kabelverschraubungen, metrisch, Edelstahl 1.4305

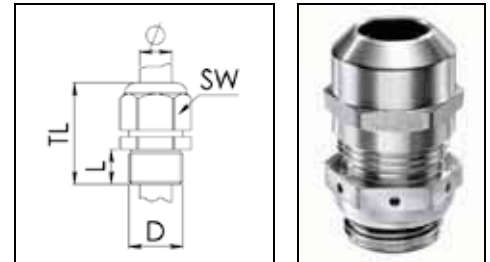

Schutzart gemäß EN 60 529: IP 68 bis 0,6 bar
Schutzart gemäß DIN 40 050-T9: IP 69K
Einsatztemperatur: -40°C bis 100°C, kurzzeitig bis ca. 120°C
Material: - Verschraubung: Edelstahl A2 (1.4305 / AISI 303)
 - Klemmkäfig: Polyamid
 - Dichtungen: EPDM
 - Membran: ePTFE
Ausstattung: - Kondenswasserminimierung durch mikroporöse, flüssigkeitsdichte und atmungsaktive ePTFE-Membran als integriertes Element der Kabelverschraubung
 - Optimale Abdichtung und Zugentlastung durch patentiertes WISKA-Lamellensystem
 - Abdichtung am Gehäuse durch zusätzlichen EPDM O-Ring
 - Gleiche Dichtbereiche und Schlüsselweiten für alle SPRINT-Verschraubungen
 - Lieferbar mit Reduzierdichteinsatz, Mehrfach- und Sonderdichtungen und Staubschutzscheibe

Type	WISKA-No.					TL
			mm	mm	mm	mm
ESSVG 20 EMV-Z	10069406	1	M 20x1,5	6 · 13	24	41 · 50
ESSVG 25 EMV-Z	10069407	1	M 25x1,5	9 · 17	30	43 · 52
ESSVG 32 EMV-Z	10069408	1	M 32x1,5	13 · 21	36	47 · 56
ESSVG 40 EMV-Z	10069409	1	M 40x1,5	16 · 28	46	57 · 70
ESSVG 50 EMV-Z	10069410	1	M 50x1,5	21 · 35	55	64 · 77
ESSVG 63 EMV-Z	10069411	1	M 63x1,5	34 · 48	68	69 · 83